

Piston accumulators series EHP – Low Cost

Construction

Cost-effective, non-repairable piston accumulators, vessel in steel.

Pre-Charge pressure P₀

0,95 P₁

Temperature range

Standard model -20 °C to +100 °C.

Hydraulic fluids


Hydraulic oil (mineral oil)

Other mediums, such as biodegradable hydraulic oil, non-flammable liquids, water, emulsions, fuels, ect. should be specified at the time of ordering.

Installation

User-defined.

Leave a space of 200 mm free above the gas inlet valve for attaching the tester and pressurizer instrument.

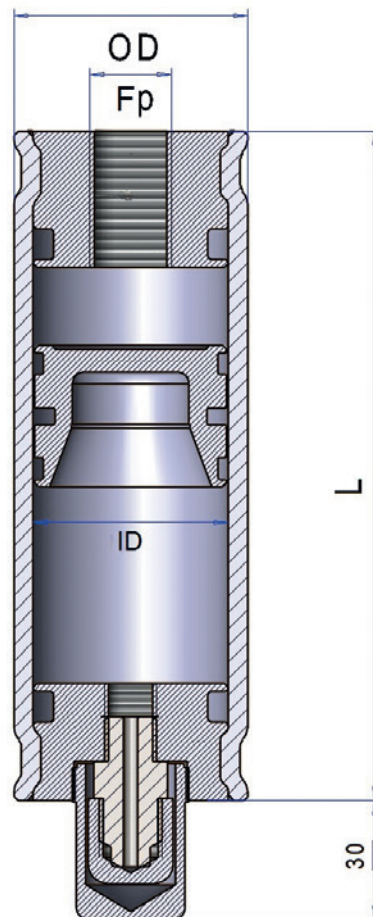

Model	Gasvol. V ₀ liter	Design pressure Bar	Weight kg	Dimensions in mm			
				L	OD	ID	FP
EHP 0,1 – 250 / 50 / 00	0,1	250	1,9	136	60	50	R ½"
EHP 0,2 – 250 / 50 / 00	0,2	250	2,2	187	60	50	R ½"
EHP 0,3 – 250 / 50 / 00	0,3	250	2,6	238	60	50	R ½"
EHP 0,4 – 250 / 50 / 00	0,4	250	2,9	289	60	50	R ½"
EHP 0,5 – 250 / 50 / 00	0,5	250	3,3	340	60	50	R ½"
EHP 0,7 – 250 / 50 / 00	0,7	250	4,0	442	60	50	R ½"
EHP 1 – 250 / 50 / 00	1	250	5,0	594	60	50	R ½"

Issued in accordance with PED 2014/68/EC, article 4 clause 3 , without CE-marking.

Manufacturer's tolerances not taken into account.

The right to make modifications reserved.